


Customized Ferrule

≤0.15μm
Concentricity

Tailored Solutions for Fiber Optic, Medical & Industrial



Concentricity at both ends

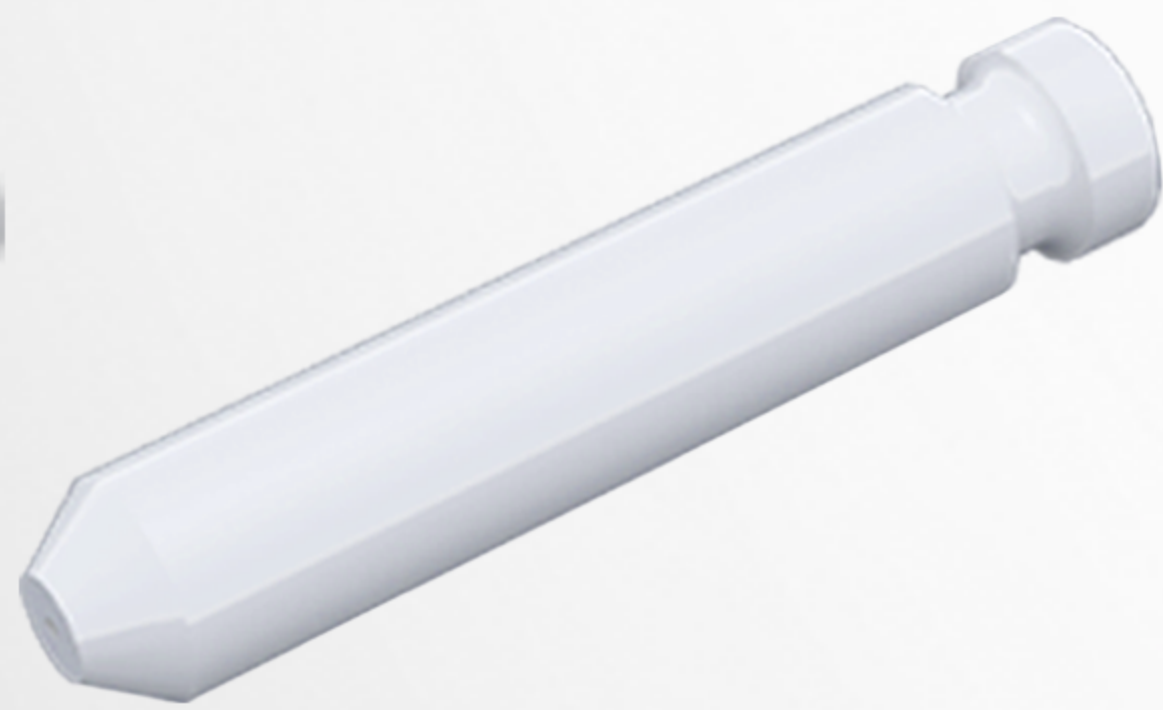

Grooved ferrule



LC ferrule with special length



Black LC Ferrule

Customized Ferrule	
Outer diameter	0.18mm-3.0mm
Inner diameter	50μm-500μm
Concentricity	minimum 0.15μm
Slotting	a variety of customized sizes
Chamfering	a variety of customized sizes
Length	2.0mm-13mm

Note: Inner diameter tolerance: ±0.5μm (default), customizable based on customer's fiber outer diameter.



Aerospace



Medical



Data Center



FTTX systems



Test Equipment

📍 Sales Office: 31 ROCHESTER DRIVE #24-00 PARK AVENUE ROCHESTER SINGAPORE 138637

📍 Production Base: 4 jalan Tiram Sejahtera I, Taman Perindustrian Tiram Sejahtera 81800, Ulu Tiram, Johor, Malaysia

✉ E-mail: official@sunconec.com

🌐 www.sunconec.com

