


# Non-Contact MPO Connector & Master Cord

✓ **Anti-reflection Coating**  
Dust insensitive




**NC MPO**

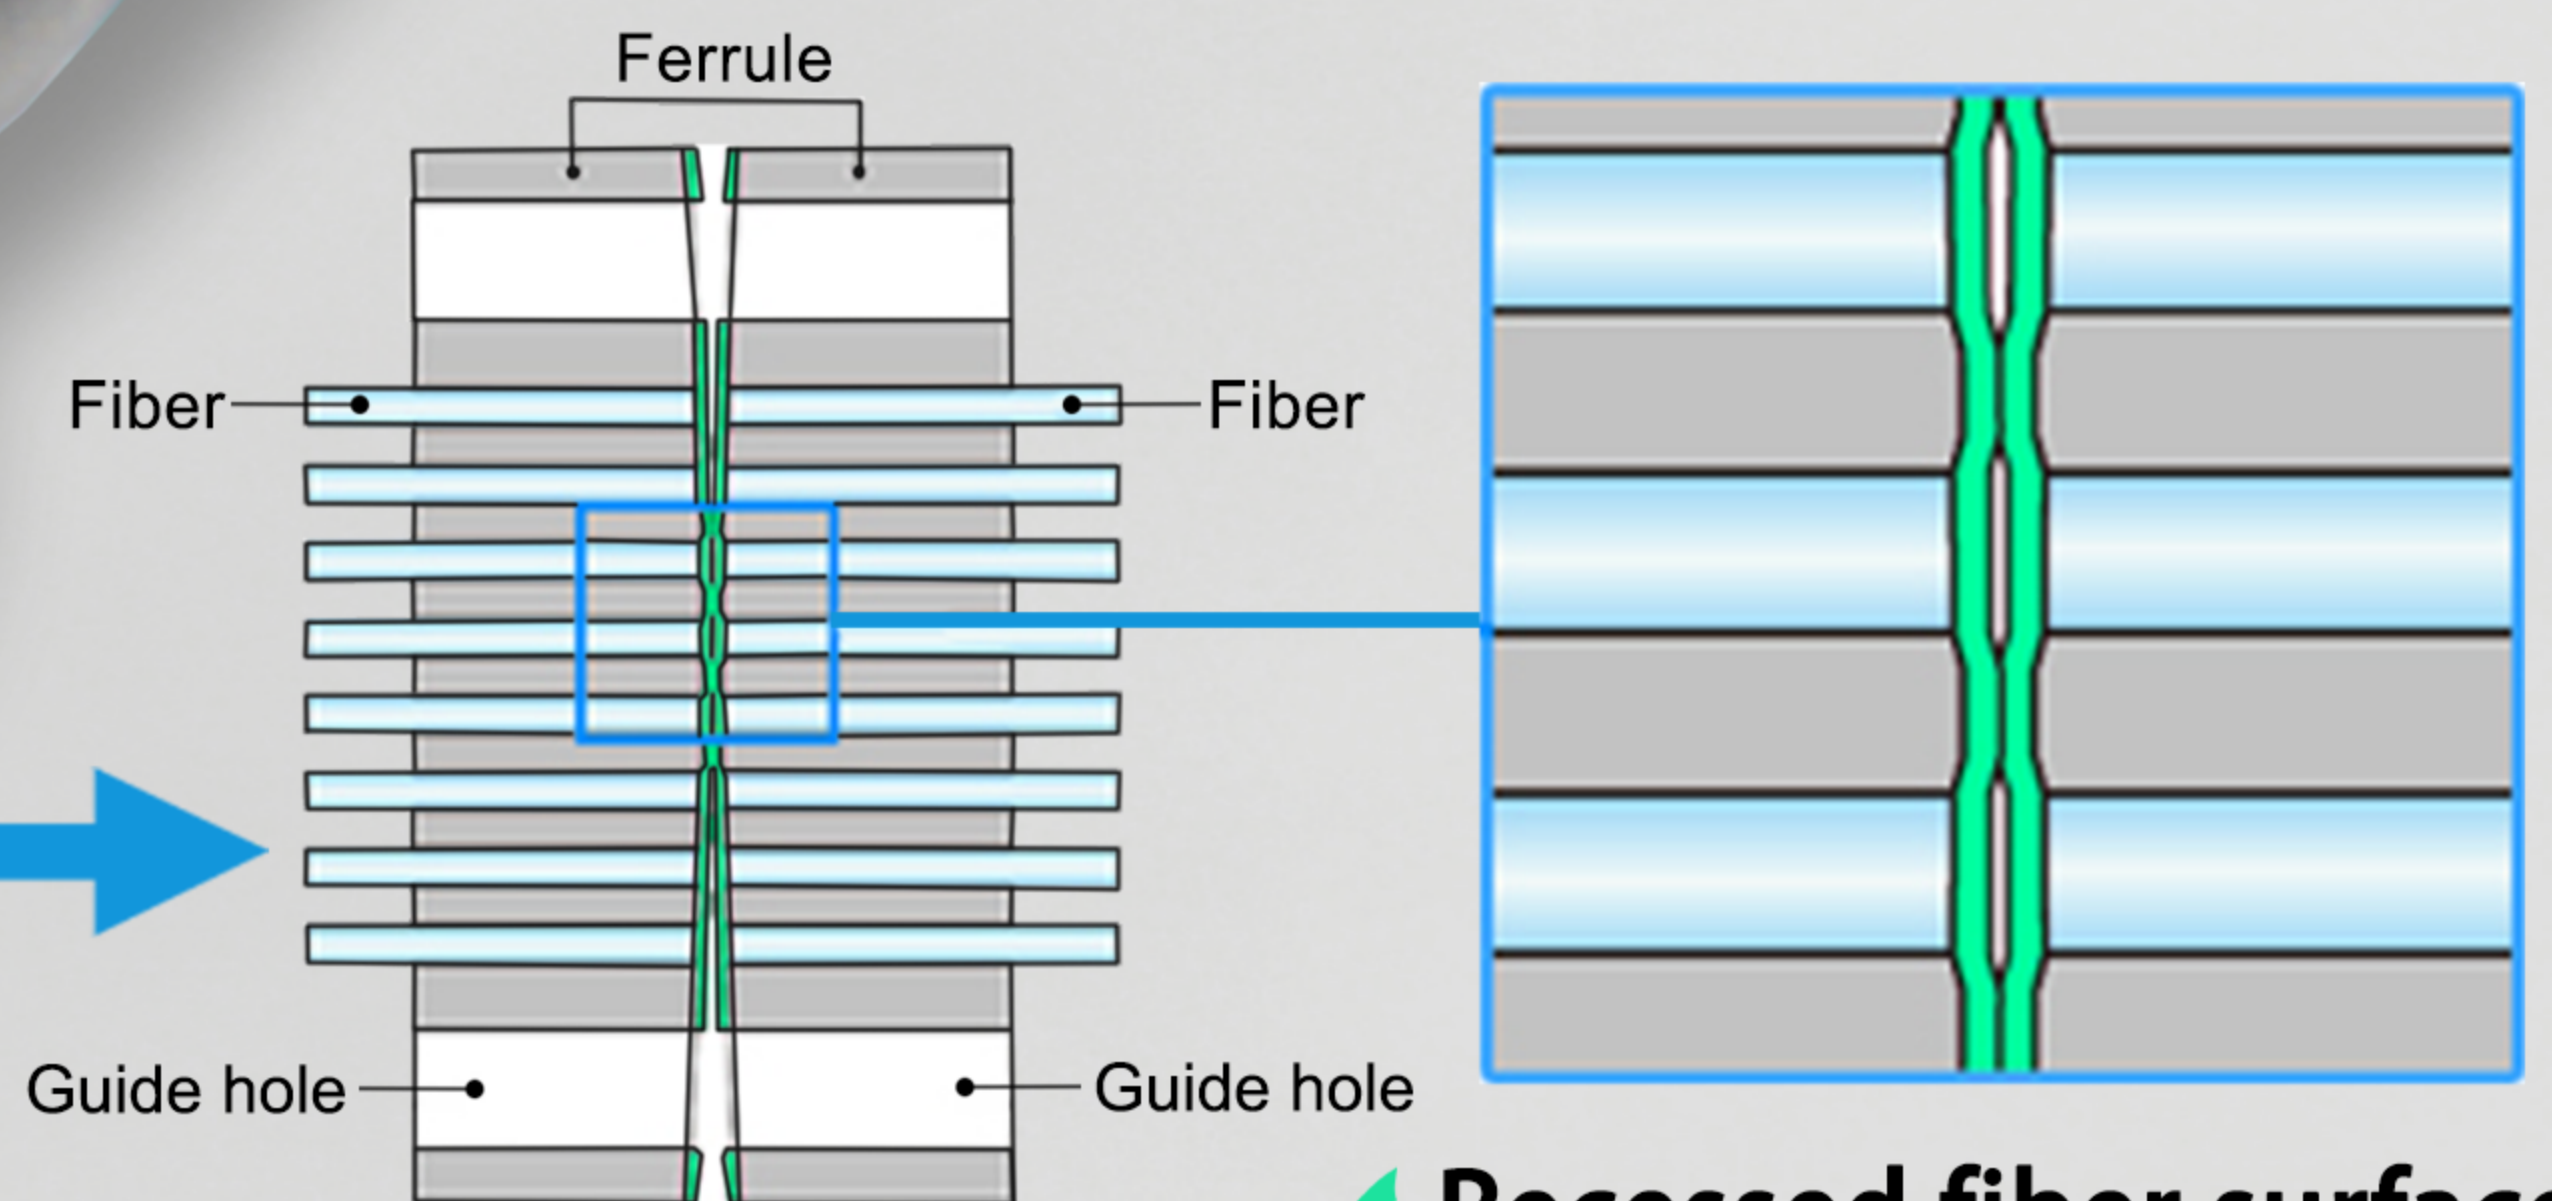

**AR coating**

✓ **Recessed fiber surface**  
Ensure longer service life/low IL

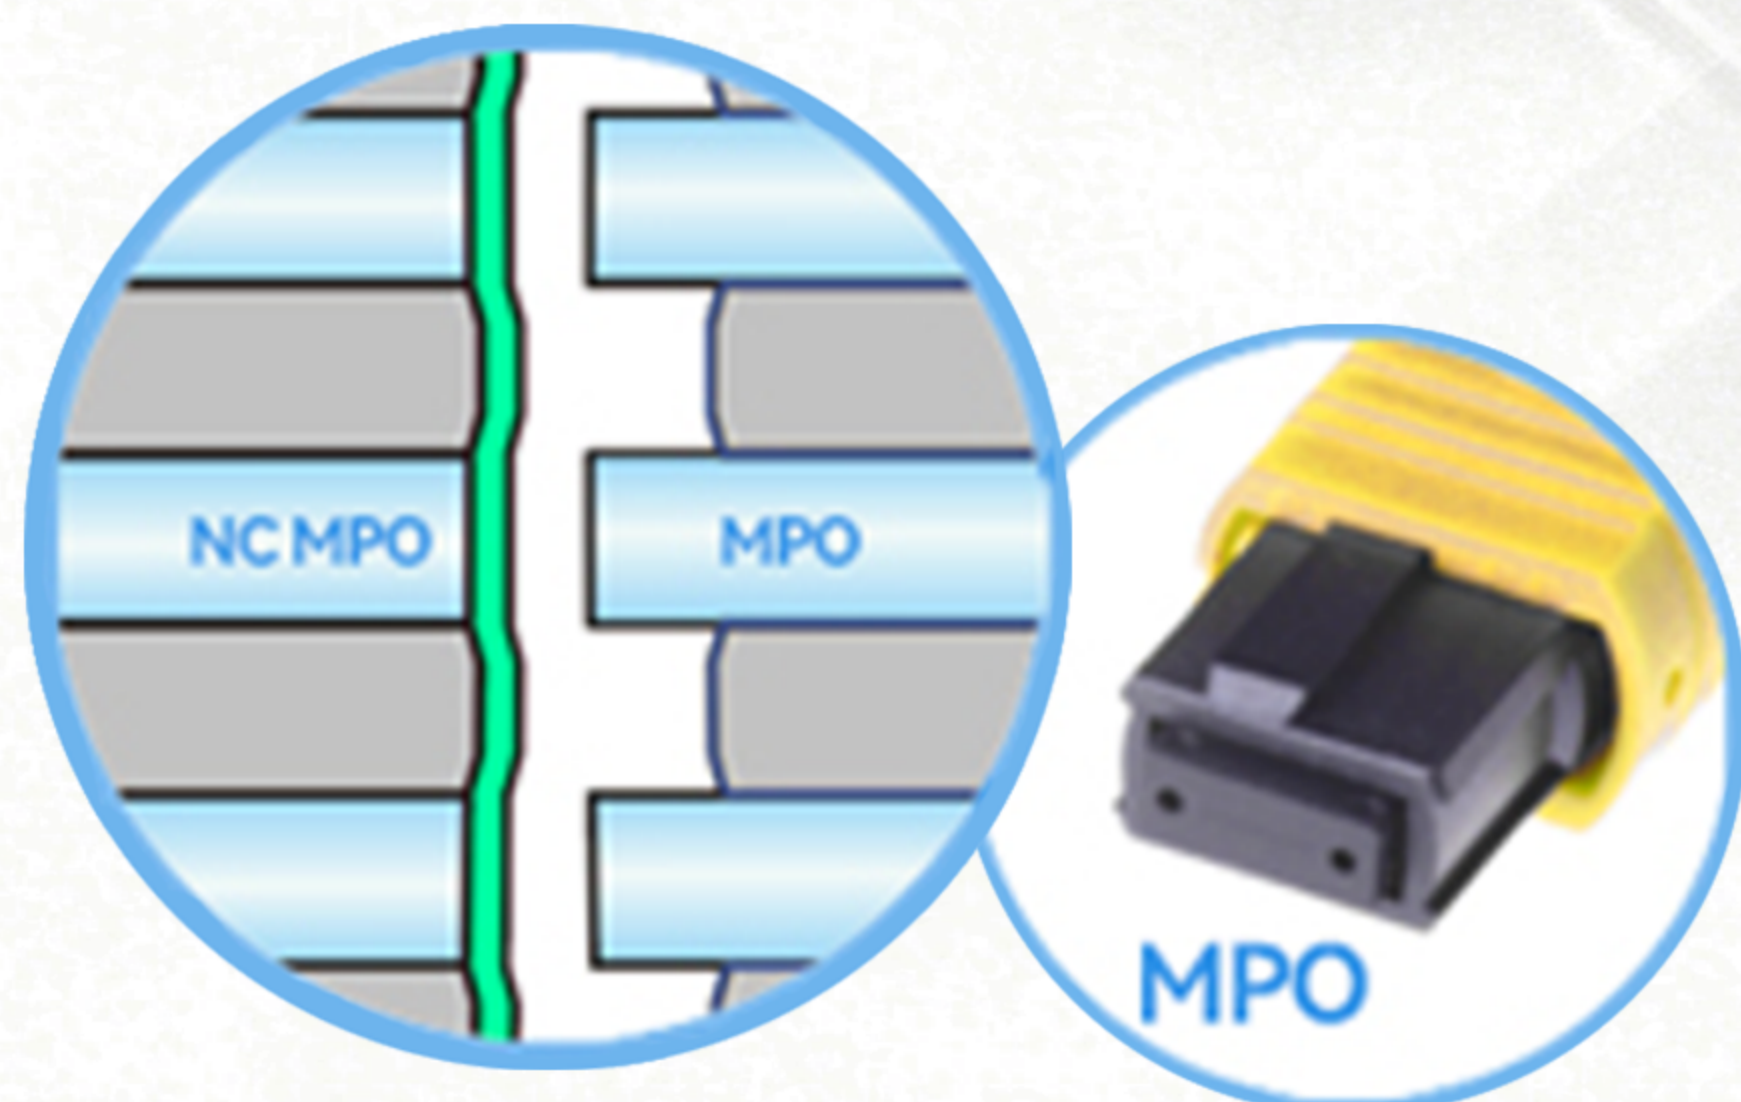

**MPO-LC (24-CORE)**

## Features:

- Durability: >500 times mating (10 times traditional MPO)
- Cable jacket fire rating: UL/OFNP/OFNR/CPR: Dca/Cca/B2ca
- Compliance to EIA/TIA, Telcordia GR-1435-CORE Standards

📍 Sales Office: 31 ROCHESTER DRIVE #24-00 PARK AVENUE ROCHESTER SINGAPORE 138637

📍 Production Base: 4 jalan Tiram Sejahtera I, Taman Perindustrian Tiram Sejahtera 81800, Ulu Tiram, Johor, Malaysia

✉ E-mail: [official@sunconec.com](mailto:official@sunconec.com)

🌐 [www.sunconec.com](http://www.sunconec.com)

